

LEGEND:

- ① REMOVING GUARDRAIL
 - ② REMOVING GUARDRAIL ANCHOR
 - ③ REMOVE SIGN
 - ④ RELOCATE "HANSEN CREEK" SIGN AS DIRECTED BY SKAGIT COUNTY
 - ⑤ SELECTIVE TREE REMOVAL, SEE NOTE 6
 - ⑥ REMOVAL OF STRUCTURE AND OBSTRUCTION - EXISTING BOX CULVERT, SEE NOTE 7
 - ⑦ REMOVAL OF STRUCTURE AND OBSTRUCTION - EXISTING ARCH CULVERT, SEE NOTE 7
 - ⑧ REMOVE PORTION OF EX WIRE FENCE WITHIN WORK LIMITS. REPLACE AFTER CONSTRUCTION
-
- ROADWAY EXCAVATION - FULL DEPTH
 - ROADWAY EXCAVATION - PARTIAL DEPTH
 - POTENTIAL STAGING AND STOCKPILING AREA
 - RIGHT-OF-WAY LIMITS
 - WORK LIMITS
 - CLEARING AND GRUBBING LIMITS
 - STRAW WATTLES
 - SILT FENCE
 - HIGH VISIBILITY SILT FENCE
 - CUT LIMITS
 - FILL LIMITS
 - APPROXIMATE EXISTING TREE LOCATION


NOTES:

1. UTILITY RELOCATION AND INSTALLATION BY OTHERS.
2. CONTRACTOR TO RELOCATE MAILBOXES TO LOCATION DESIGNATED BY THE COUNTY. ALL MAILBOXES TO BE RETURNED TO ORIGINAL LOCATION AFTER CONSTRUCTION IS COMPLETE.
3. CONTRACTOR SHALL MINIMIZE CLEARING AND GRUBBING TO THE LIMITS SHOWN ON THESE CONTRACT PLANS. SEE CONTRACT SPECIFICATIONS.
4. CONTRACTOR MAY USE AREAS WITHIN EXISTING ROW FOR STAGING AND STOCKPILING. ALL RESIDENTIAL INGRESS AND EGRESS MUST BE MAINTAINED AT ALL TIMES. CONDITIONS OF TEMPORARY CONSTRUCTION EASEMENTS, PERMANENT EASEMENTS, AND PROJECT PERMITS MUST BE FOLLOWED.
5. SEE SHEET 11 FOR MINKLER ROADWAY STATIONING AND CONTROL.
6. EXISTING TREE LOCATIONS ARE APPROXIMATE. SEE CONTRACT SPECIFICATIONS.
7. EXISTING RIPRAP FROM OUTLET PROTECTION OR EMBANKMENT PROTECTION FOR EXISTING CULVERTS IS PRESENT AND MAY BE SUITABLE FOR RE-USE ON-SITE AS LIGHT LOOSE RIPRAP. SEE CONTRACT SPECIFICATIONS.
8. ALL DISTURBED AREAS TO BE RESTORED TO PRE-PROJECT CONDITIONS.

SKAGIT COUNTY PUBLIC WORKS
 1800 CONTINENTAL PLACE
 MOUNT VERNON, WA 98273-6625
 (360) 336-9400 FAX (360) 336-9478



NO.	REVISIONS	DATE

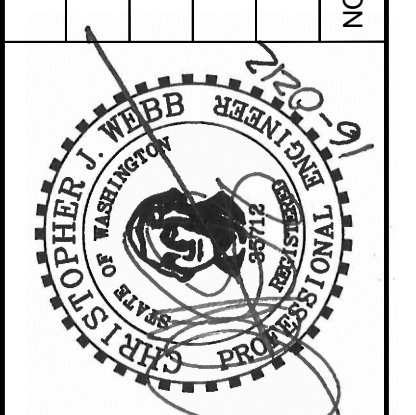

PROJECT NO: WA120328
 FED. AID NO:
 DESIGNED BY: TDP
 CHECKED BY: CJW
 APPROVED BY:
 PROJECT LOCATED NEAR:
 SEDRO-WOOLLEY, WA
 SECTS 19 & 20, TOWNSHIP 35 N, RANGE 05 E, W.M.

**HANSEN CREEK REACH 5
 MINKLER ROAD BRIDGE
 PHASE 2 - FINAL DESIGN**
 SITE PREPARATION AND TESC PLAN

1 INCH SCALE BAR
 ADJUST SCALE ACCORDINGLY
 SHEET
9 OF 33

CALL TWO (2) BUSINESS DAYS BEFORE YOU DIG

1-800-424-5555